


Circular suspension

DRSN

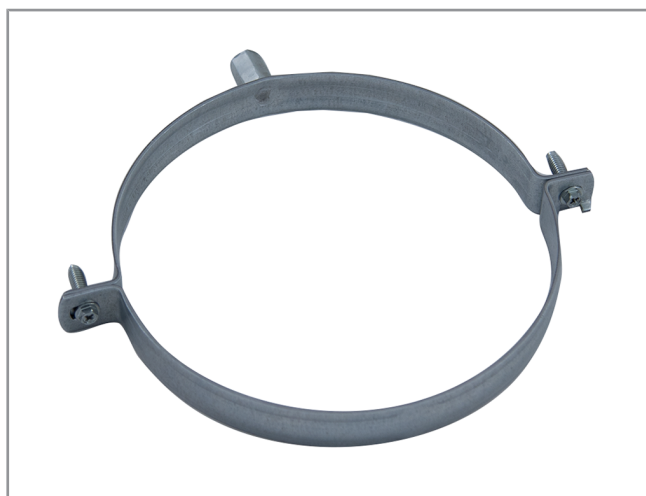

Description

For suspension of circular ducting.

Combined connection nut M8/M10 and slotted quick closure for Ø63-400.



Note! Use a spanner or wrench to tighten the nut that connects the combined connection nut to the threaded rod.


If the suspension bracket is tightened by hand, there is a risk of twisting the connection nut off.

Order code

Product	DRSN
Dimension Ød	250

Order example: DRSN-250

Dimensions

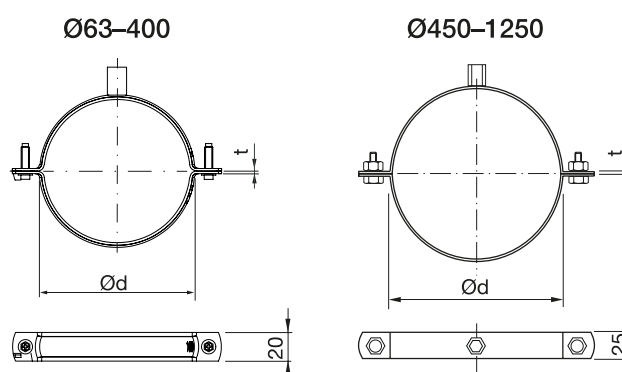

Ø63-400

With slotted quick closure.

With screw M6×20 and head hex 1/4" and PH2.

Connection nut M8+M10

Ø450-1250

With Ø10 hole.

With bolt and nut H17 M10×30.

Connection nut M8+M10


Ød nom	t mm	m kg
63	1,5	0,12
80	1,5	0,13
100	1,5	0,15
125	1,5	0,17
140	1,5	0,19
150	1,5	0,19
160	1,5	0,20
180	1,5	0,22
200	1,5	0,24
224	1,5	0,26
250	1,5	0,28
280	1,5	0,32
300	1,5	0,34
315	1,5	0,36
355	1,5	0,41
400	1,5	0,45
450	2,5	0,83
500	2,5	0,91
560	2,5	1,00
600	2,5	1,06
630	2,5	1,10
710	2,5	1,36
800	2,5	1,49
900	2,5	1,64
1000	2,5	1,82
1120	2,5	2,00
1250	2,5	2,20

Circular suspension


DRSN

Technical data

Max. recommended load for different fire classes.

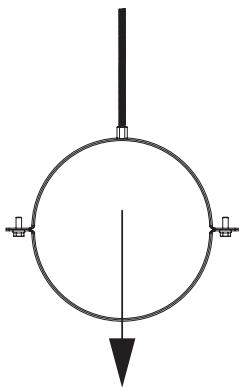

Installation		Ventilation system					Smoke control system
		R0	R15	R30	R45	R60	600 °C
Dim	no fire class	kg	kg	kg	kg	kg	120 min.
63-600	65	-	-	-	-	-	kg
600-1250	65	-	-	-	-	-	-

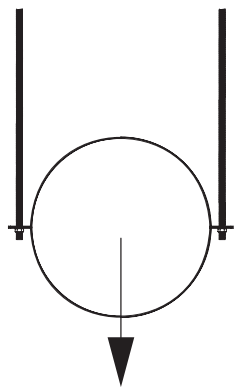

Installation		Ventilation system					Smoke control system
		R0	R15	R30	R45	R60	600 °C
Dim	no fire class	kg	kg	kg	kg	kg	120 min.
450-1250	160	-	-	-	-	-	kg
							158