

Reducer


RCUIN



Description

The reducer is double-jacketed and insulated with mineral wool, and is supplied with LindabSafe rubber seal in the inner dimension.

Dimensions

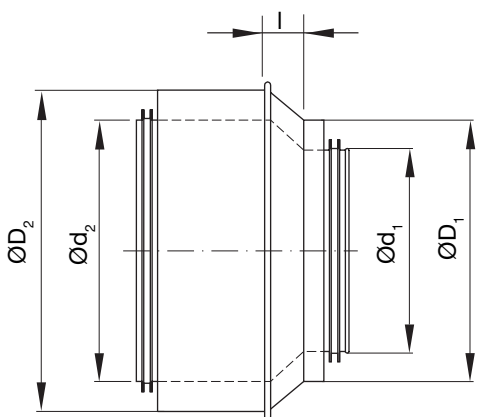

Ød ₁ nom	Ød ₂ nom	ØD ₁ nom	ØD ₂ nom	l mm	m kg
100	80	132	112	38	0,30
125	80	157	112	55	0,45
125	100	157	132	45	0,40
160	80	192	112	75	0,70
160	100	192	132	65	0,60
160	125	192	157	50	0,53
180	80	200	112	0	0,96
180	100	200	132	55	0,90
180	125	200	157	40	0,70
180	160	200	192	20	1,15
200	100	232	132	46	0,95
200	125	232	157	55	0,95
200	160	232	192	39	0,80
200	180	232	200	23	1,35
224	100	260	132	0	1,50
224	125	260	157	0	1,50
224	160	260	192	44	1,50
224	180	260	200	32	1,50
224	200	260	232	24	1,40
250	100	280	132	0	1,50
250	125	280	157	70	1,50
250	160	280	192	60	1,60
250	180	280	200	47	1,50
250	200	280	232	42	1,50
250	224	280	260	29	1,60

Ordering example

