

Suspension clamp

INUV25




Description

Clamp with short ear, for suspension of circular ducting in restricted spaces.

For insulated duct it is recommended that the suspension ring is mounted inside the insulation.

Dimensions

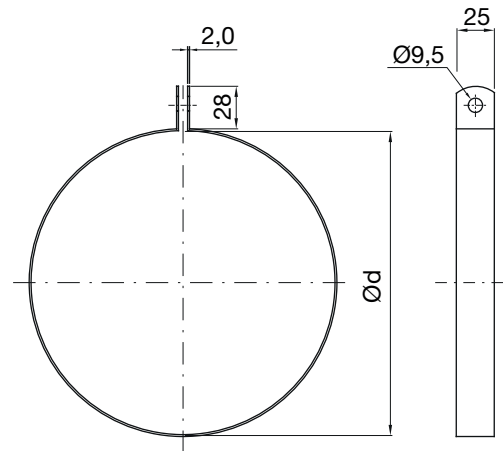

Ød nom	m* kg
80	0,14
100	0,16
112	0,17
125	0,18
132	0,20
157	0,23
160	0,24
180	0,26
192	0,27
200	0,28
224	0,31
232	0,32
250	0,35
260	0,36
280	0,38
300	0,41
315	0,43
355	0,48

Order code

Product	INUV25	200
Dimension Ød		

