


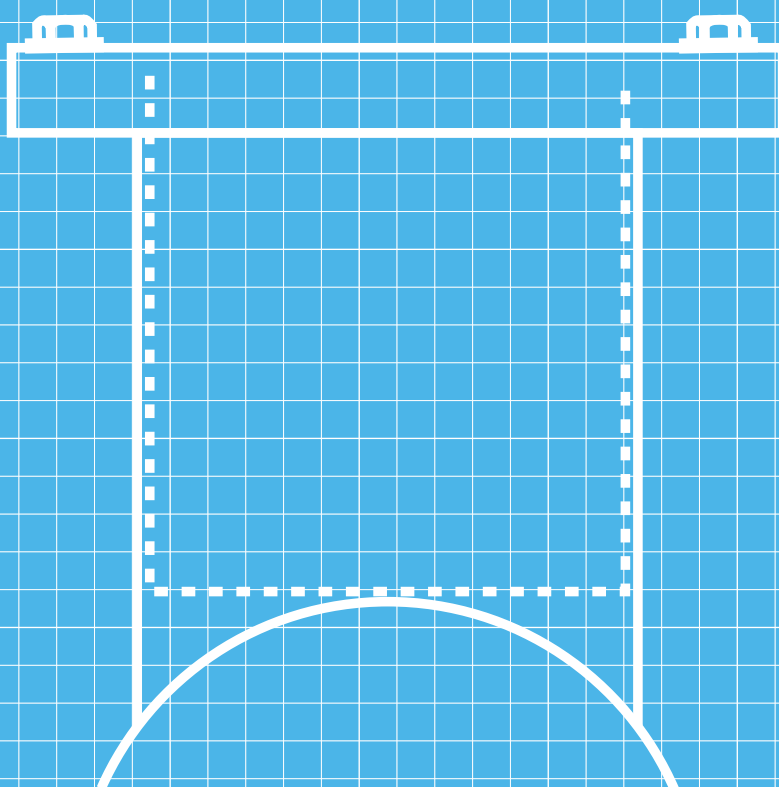


Lindab **Access door EKTL**

Mounting instruction

Access door

EKTL

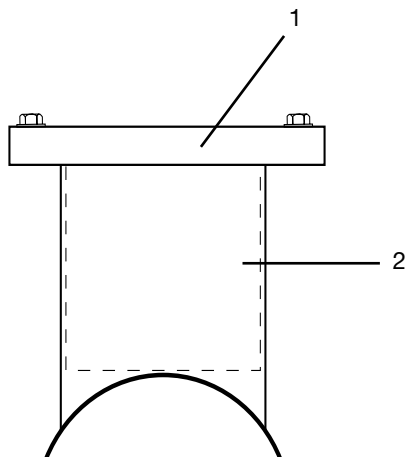

- 1 Access door
2 Fixing frame

1. Remove the access door by loosening and removing the screws.
(Fig. 1)
2. Use the fixing frame as a template and cut out a hole in the duct.
(Fig. 2)
3. Apply a string of sealant around the hole and put the frame back.
(Fig. 3)
4. Drill and fasten the frame using blind rivets, spacing them 50 mm apart. Do not use screws.
(Fig. 4)
5. If the duct is insulated, ensure that the insulation fits tightly against the fixing frame.
6. Mount the door in the frame and lock it.
(Fig. 5)

Fig. 1

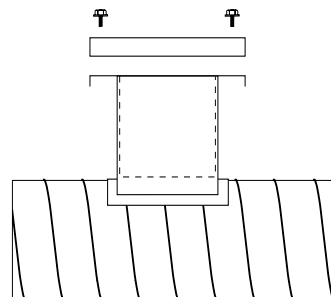


Fig. 2

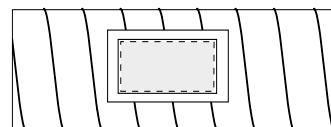


Fig. 3

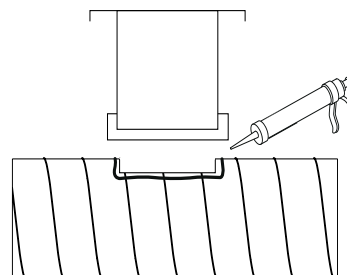


Fig. 4


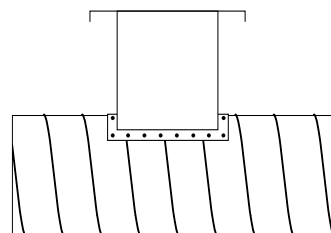


Fig. 5



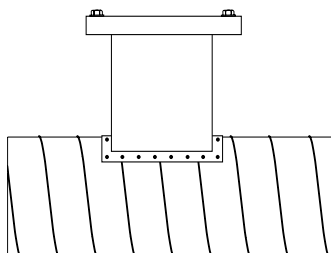

Most of us spend the majority of our time indoors. Indoor climate is crucial to how we feel, how productive we are and if we stay healthy.

We at Lindab have therefore made it our most important objective to contribute to an indoor climate that improves people's lives. We do this by developing energy-efficient ventilation solutions and durable building products. We also aim to contribute to a better climate for our planet by working in a way that is sustainable for both people and the environment.

[Lindab | For a better climate](#)