


Collar pipe


RGIN

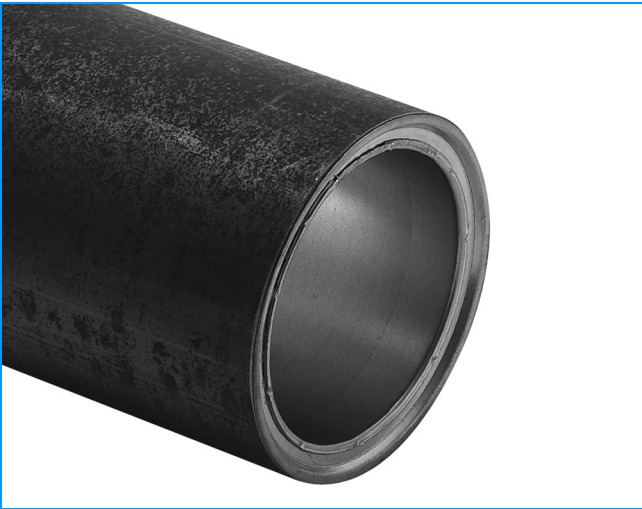

Description

The RGIN is lead through the decks and bulkheads to connect the ducts or fittings, and is insulated with mineral wool. Also available with yellow primer or in aluminium.

Dimensions

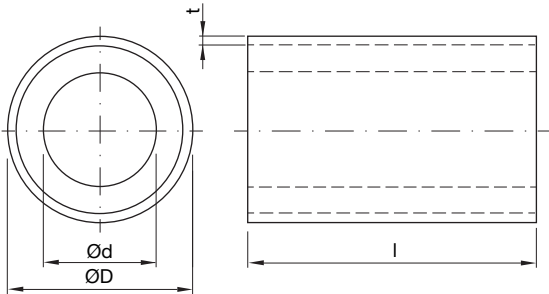

Ød nom	ØD mm	l mm	t mm	m kg
80	114,3	125	3,60	1,30
80	114,3	200	3,60	2,00
80	114,3	900	3,60	9,00
100	139,7	125	6,30	2,90
100	139,7	200	6,30	4,60
100	139,7	900	6,30	21,50
125	159,0	125	4,50	2,60
125	159,0	200	4,50	4,10
125	159,0	900	4,50	19,50
160	193,7	125	5,60	3,60
160	193,7	200	5,60	5,80
160	193,7	900	5,60	27,20
180	219,1	125	4,50	3,40
180	219,1	200	4,50	5,40
180	219,1	900	4,50	25,70
200	244,5	125	6,30	5,20
200	244,5	200	6,30	8,30
200	244,5	900	6,30	39,00
250	298,5	200	8,80	14,20
250	298,5	900	8,80	64,00

Order code

	RGIN	125	900
Product			
Dimension Ød			
Length l			

